KetroTI+ Utilities

pre-MKMI O.M.B. NO. 3067-0077 Expires May 31, 1996

**ELEVATION CERTIFICATE** 

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to actermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
Rudy ). DEH/ER & ELEAVOR DEHL	
STREET ADDRESS (Including Apt., Unit, Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
9 PEG LEG WAY	
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	
20 J 8 8/K 159	
Creat The Dreat Co all.	STATE ZIP CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFOR	MATION
revide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 3. SUFFIX 4. DATE OF FIRM INDEX 5. FIRM	RM ZONE 6. BASE FLOOD ELEVATION
340518 7 A 1/6/83 A	(in AO Zones, use depth)
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): The S. For Zones A or V, where no BFE is provided on the FIRM, and the community has established	d a BFE for this building site, indicate
the community's BFE: Liliand L	n 7).
SECTION C BUILDING ELEVATION	
Using the Elevation Certificate Instructions, indicate the diagram number from the diagrams for describes the subject building's reference level  Ta). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the of   feet NGVD (or other FIRM datum—see Section B, Item 7).  5). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural the selected diagram, is at an elevation of   feet NGVD (or other FIRM datum (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram below (check one) the highest grade adjacent to the building.  (c). FIRM Zone AO. The floor used as the reference level from the selected diagram is one) the highest grade adjacent to the building. If no flood depth number is available, is the level) elevated in accordance with the community's floodplain management ordinance?  Indicate the elevation datum system used in determining the above reference level elevations under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevation the FIRM [see Section 8, Item 7], then convert the elevations to the datum system used on the firm formula of the firmula of	he selected diagram is at an elevation  member of the reference level from  m-see Section B, Item 7).  am is feet above or  lefeet above or below (check  building's lowest floor (reference     Yes No Unknown
equation under Comments on Page 2.)	
Elevation reference mark used appears on FIRM: Yes No (See Instructions on Page	
The reference level elevation is based on: Actual construction Construction drawings NOTE: Use of construction drawings is only valid if the building does not yet have the reference this certificate will only be valid for the building during the course of construction. A post of the building during the course of construction.	nce level floor in place, in which -construction Elevation Certificate
ne elevation of the lowest grade immediately adjacent to the building is: 11466 election B, Item 7).	et NGVD (or other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
1. If the community official responsible for verifying building elevations specifies that the reference is not the "lowest floor" as defined in the community's floodplain management ordinance, the floor" as defined by the ordinance is: 11117.0 feet NGVD (or other FIRM datum—see 2. Date of the start of construction or substantial improvement	elevation of the building's "lowest


## SECTION E CERTIFICATION

nis certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE), V1–V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by line or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Alfix Seal)		
_ laur	Fierson 27492		
TITLE /	COMPANY NAME		
P.L.G.	East Coast Eng. INC.		
ADDRESS	CITY	ZIP	
1314 Ho	observe, Jone River, N.J. 08753.		
SIGNATURE	1 There 8/14/95 908.244.3030	2	
Copies should be	e made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building own	ner.	
COMMENTS: =_4	Locations of utilities unfroms.		
- garag			
		· · · · · · · · · · · · · · · · · · ·	

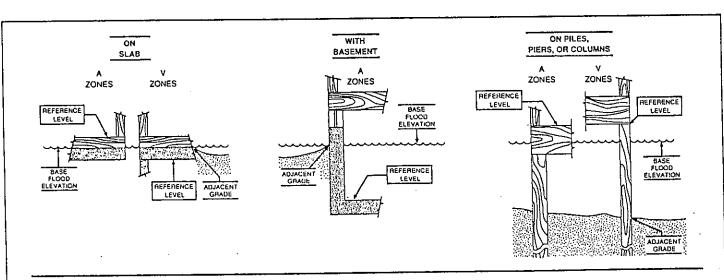

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.